


Tellurian Networks Residential DSL Setup Guide

Thank you for choosing Tellurian Networks Residential DSL service. Your Comtrend CT-507 DSL Router has been sent preconfigured. Please follow these step-by-step instructions to set up the DSL router for use with your computer.

Unpack the Comtrend CT-507 DSL Router and Verify Package Contents

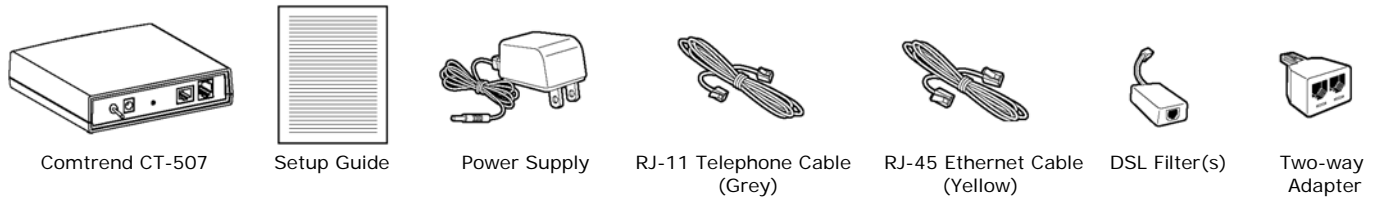

Install DSL Filters


1. Install a DSL filter on EVERY telephone (or fax machine, or DirecTV unit, or caller-id box, etc.) that shares your DSL line, as shown below.
2. If the phone jack where you plan to plug in your Comtrend CT-507 is already connected to a telephone or telephone device, use the two-way telephone adapter to connect both the Comtrend CT-507 and your telephone or telephone device to the same jack as shown below.

*** IMPORTANT - DO NOT INSTALL A DSL FILTER ON THE LINE TO THE COMTREND CT-507! ***



Setup the Comtrend CT-507

1. Place the Comtrend CT-507 near your PC or another location that permits easy access and visibility. Make sure any Ethernet cables are kept away from power cords, fluorescent lighting fixtures, and other sources of electrical interference.
2. Connect the Power Supply to the power jack on the back panel of the Comtrend CT-507 and then into the nearest electrical outlet.
3. Turn on using the power switch and the **PWR** light will come on.
4. Connect the **grey RJ-11 Telephone Cable** from the **LINE** port on the back of the Comtrend CT-507 to the phone jack that supports your DSL service. The **LINK** indicator light will momentarily flash and then come on solid green.
5. Connect the Comtrend CT-507's Ethernet port to the Ethernet port on your PC using the **yellow RJ-45 Ethernet Cable**. The **LAN** light will come on solid green.
6. Check the network settings for: Windows 98 and Windows ME
 - Click "Start → Settings → Control Panel", double-click the **Network** icon.
 - In the list of network components, highlight the entry that says "**TCP/IP (your Ethernet card here)**".
 - Next, click **Properties** in the TCP/IP Properties window. Select **Obtain an IP address automatically** and click **OK**.
 - In the **Network** window, click **OK** and restart your computer.

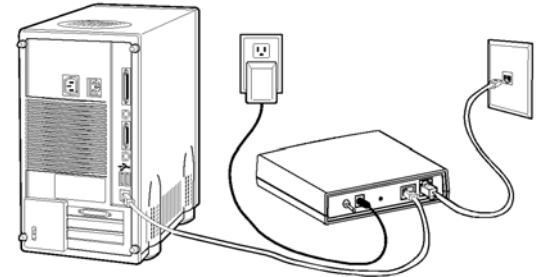

Check the network settings for: Windows 2000 and Windows XP

- Click "Start → Settings → Control Panel → Network Connections", double-click the **Local Area Connection** icon.
- In **Local Area Connection Status** window, click on the **Properties** button, click once on **Internet Protocol [TCP/IP]** to highlight, and then click the **Properties** button.
- Click the **Obtain IP address automatically** radio button and the **Obtain DNS server address automatically** radio button. Click the **OK** button; restart your PC when prompted.

Check the network settings for: Macintosh - Your Macintosh must be using Mac OS 7.6.1 or higher

- Select **Control Panels** from the Apple menu. Open the **TCP/IP Control Panel**.
- Choose **Connect via Ethernet**. Choose **Configure Using DHCP Server**. Close and Save.

Check the network settings for: Mac OS X

- Launch **System Preferences** from the Dock or from the Apple Menu. Select the **Network Preference Pane**.
- Choose Show: **Built-in Ethernet**. Click the **TCP/IP tab**. Choose **Configure: Using DHCP**.
- Quit System Preferences. You do not have to restart the Macintosh

Congratulations! You should now be connected to the Internet with your Comtrend CT-507 Router
For assistance, please Call Tellurian Networks Technical Support at 973-300-9561